


Gleam Down Lights

ITEM SKU#: 662187493527

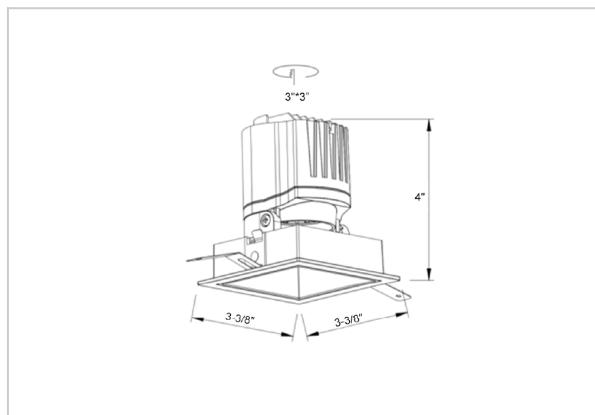

Product Code : IK-RGLEAMDL-8W-35K-BL-90C-15D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	764.5lm
Power	8W
Efficacy	140lm/w
CCT	3500K
CRI	>90
Beam Angle	15°
Light Distribution	Spot
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Swiveling Type
Dimming	On-Off / Triac / 0-10 V
Construction	Sqaure
Mounting Type	Recessed
Heads	Single Head
Body Material	Aluminium Die cast
Finish	Black
Length	3-3/8"
Height	4"
Diameter	2-7/8"
Cut Out	3"x3"
Optics	Darklight Technology Black, Silver
Width (W)	3-3/8"
Application Area	Guest Room, Corridor, Restaurant, Meeting Room Club, Hall, Hotel Entrance



COB LED



DIMMABLE



IP20

Beam Spread (Options)

Spot	15°	Medium	24°	Flood	38°	Wide Flood	60°
ft	Ø	ft	Ø	ft	Ø	ft	Ø
3.0	0.72	3.0	1.41	3.0	2.03	3.0	3.15
9.0	2.15	9.0	4.22	9.0	6.09	9.0	9.45
15.0	3.58	15.0	7.04	15.0	10.15	15.0	15.75

Gleam, a square shaped LED downlight is made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink that ensure high-durability. The specular darklight reflector in this store light allows outstanding visual comfort to the visitors so that they are able to explore the merchandise with ease.

Technical Data

[IES File Link](#)
[Installation Instructions Link](#)