


Glim Down Lights

Technical Data Sheet

ITEM SKU#: 662187494647

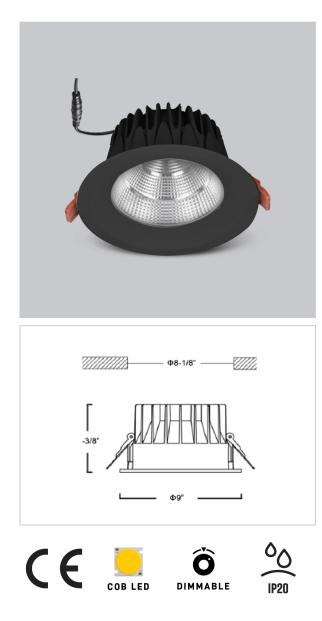

Product Code : IK-RGLIMDL-40W-27K-BL-90C-60D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	3600lm
Power	40W
Efficacy	90lm/w
CCT	2700K
CRI	>90
Beam Angle	60°
Light Distribution	Wide flood
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Non - Swiveling Type
Dimming	On-Off / Triac / 0-10 V
Construction	Round
Mounting Type	Recessed
Heads	Single Head
Finish	Black
Height	4-3/8"
Diameter	9"
Cut Out	8-1/8"
Optics	Darklight Technology Black, Silver
IP Rating	-
Application Area	Outdoor Corridor, Bathroom, Eave.
Poom Sprood (outline)	

Beam Spread (Option)



Glim, a round shaped LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB.

retail@ikioledlighting.com I +1 844-533-4546 I www.retail.ikioledlighting.com



© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.