


Ocul Down Lights

ITEM SKU#: 662187497174

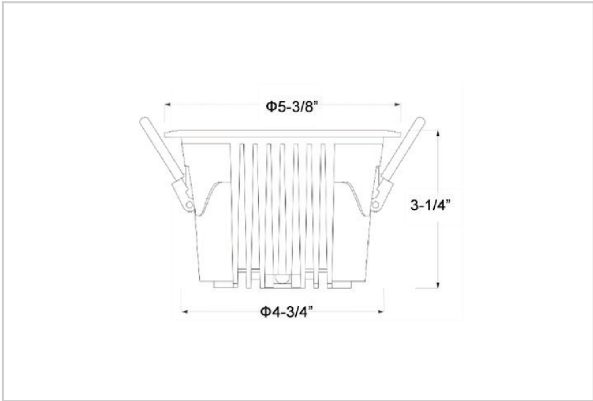

Product Code : IK-ROCULDL-20W-35K-WH-90C-60D

Voltage	100 - 277 V AC, 50-60 Hz
Lumen Output	2660lm
Power	20W
Efficacy	140lm/w
CCT	3500K
CRI	>90
Beam Angle	60°
Light Distribution	Wide flood
LED Type	COB
LED Light Source	Osram SOLERIQ S 19
Start Time	Instant
Driver	Stand Alone (included)
Operating Position	Non - Swiveling Type
Dimming	On-Off / Triac / 0-10 V
Construction	Round
Mounting Type	Recessed
Heads	Single Head
Body Material	Aluminium Die cast
Finish	White
Height	3-1/4"
Diameter	5-3/8"
Cut Out	4-3/4"
Optics	Darklight Technology Black, Silver
Application Area	Classroom, Meeting Room, Office, Club, Home

Beam Spread (Options)											
Spot 15°			Medium 24°			Flood 36°			Wide Flood 60°		
ft	Ø		ft	Ø		ft	Ø		ft	Ø	
3.0	0.72		3.0	1.41		3.0	2.03		3.0	3.15	
9.0	2.15		9.0	4.22		9.0	6.09		9.0	9.45	
15.0	3.58		15.0	7.04		15.0	10.15		15.0	15.75	

Ocul, a round shaped LED downlight made of aluminum die cast with high quality powder coated luminaire housing and optimum heat sink. Specular reflector & power grid /global connectors available with isolated LED Driver using Ultra bright OSRAM COB.