


## **Mica Pendant Lights**

## ITEM SKU#: 662187506814

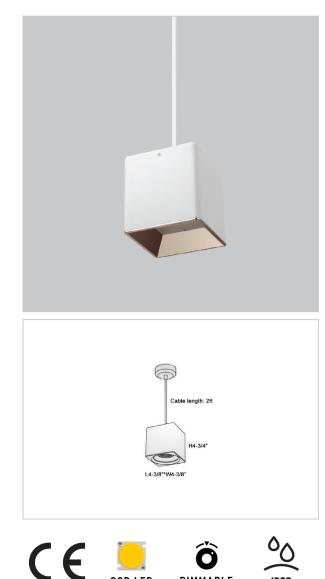

COB LED

DIMMABLE

IP20


## Product Code : IK-RMicaPL-15W-40K-WH-90C-30D

| Voltage            | 100 - 277 V AC, 50-60 Hz   |
|--------------------|--|
| Lumen Output       | 1350lm   |
| Power              | 15W  |
| CCT                | 4000K  |
| CRI                | >90  |
| Beam Angle         | 30°  |
| Light Distribution | Medium   |
| LED Light Source   | Osram SOLERIQ S 19   |
| Start Time         | Instant  |
| Driver             | Stand Alone (included)   |
| Operating Position | No Swiveling Type  |
| Dimming            | Triac Dimming / 0-10 V Dimming                                   |
| Heads              | Single Head  |
| Finish             | White  |
| Length             | 4-3/8"   |
| Height             | 4-3/4"   |
| Optics             | Reflective Cup Structure   |
| Width (W)          | 4-3/8"   |
| Application Area   | Guest Room, Restaurant, Meeting Room, Club, Hall, Hotel Entrance |

## Beam Spread (Options)

|   | beam opread (options) |  |  |  |
|---|-----------------------|--|--|--|
| Spot <mark>15°</mark> Medium <mark>30°</mark> Flood | 45°                   |  |  |  |
| ft Ø ft Ø ft  | Ø                     |  |  |  |
| 3.0 0.72 3.0 1.41 3.0 2                             | 2.03                  |  |  |  |
| 9.0 2.15 9.0 4.22 9.0 6                             | 6.09                  |  |  |  |
| 15.0 3.58 15.0 7.04 15.0 10                         | 0.15                  |  |  |  |

Mica is a technologically advanced LED Pendant Light that incorporates electronic gear and a high-quality lens with wide beam spread. While commonly used as task light, the unique and state-of-the-ard design of this luminaire also enhances the overall aesthetics of your edere. your store.





© IKIO LED LIGHTING 2025. All Rights Reserved. Products and technologies in this document may be covered by one or more Patents Pending.

The product images shown are for illustration purposes only and may not be an exact representation of the product. Specifications subject to change without notice.